

Longstor 481G1T全高清紅外熱像儀網路攝影機


龍樂科技LONGSTOR 481G1T是一款全高清紅外熱像儀，配備2MP感光器，還集成了高性能熱感應攝像頭，可同時輸出1080p高清圖像和實時熱感應屏幕。還配備了2個大功率第三代陣列型紅外，具有SmartIR的功能，可以自由調節紅外燈開關，亮度等，實現功率和實用性的完美結合。


H.264編碼，碼流自適應技術允許傳輸有限帶寬更流暢。獨特的SD卡文件模式，可以確保3年的視頻不被損壞。熱傳感器可應用於現場的溫度控制，具有報警系統，實現最大的安全性

適用情境如:廚房, 電信機房, 加油站, 彈藥庫, 化學槽車及管線, 禁止吸菸區, 等作業時易燃場所

主要功能:

- 2百萬像素CMOS傳感器
- 30 fps @ 1920x1080
- 3.6mm , 6mm , 8mm F = 1.4
- 可移動紅外截止濾鏡日夜功能
- 內置紅外照明器，有效高達50米
- 實時H.264高輪廓
- 雙向音頻
- 檢測溫度20-100°C
- 檢測距離為10米
- 支援雲端備份錄影
- 支援中繼服務器
- 獨立Windows強大的安裝軟件
- 內置PoE / (可選購) WiFi / 4G LTE模組 (可選購)
- 並行2 x 1080P , 2 x 720P和2 x D1視訊碼流輸出
- 智能紅外調節功能
- 快門可以設置為1/30至1/10000秒。
- 本機可安裝MircoSD卡錄影及重放
- 專用系統，用於使用micro SD卡內置記錄

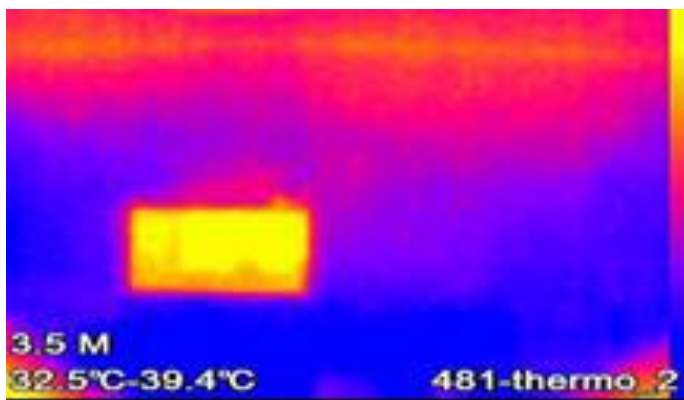

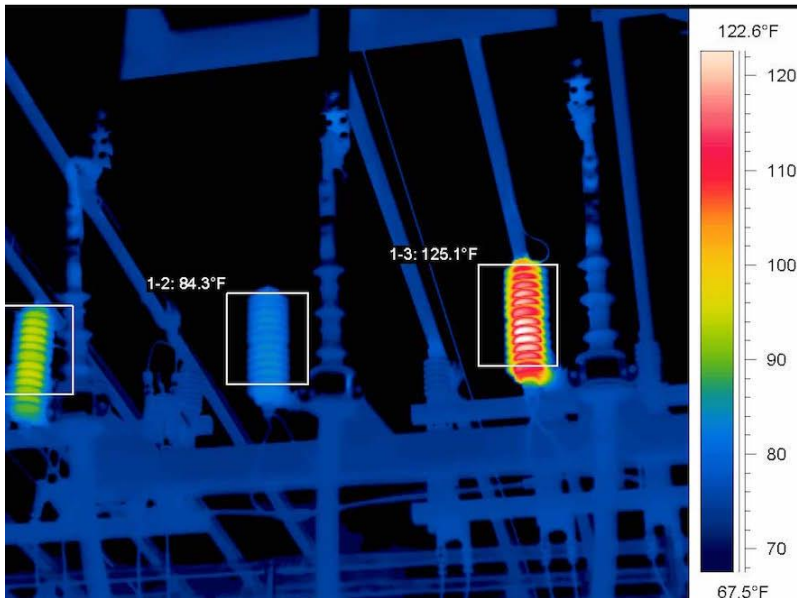

Video solutions expert

Core Information

Model LONGSTOR -481G1T (WiFi / 3G / 4G)

CPU Grain Media GM8138s H.264 IP-CAM SOC

Flash 16MB

RAM DDR3 SDRAM 128MB

Features

Image Sensor 1/2.7" 2MP Progressive CMOS

Max. Resolution 1920x1080 / 30fps.

Lens f=3.6mm, 6mm, 8mm, F1.4

Field View D: 40~140°, H: 32~100°, V: 24~72°

Shutter Time Auto/Manual (1/30~1/10000 sec. adjustable)

Day / Night Removable IR-Cut filter for day & night func.

IR Illuminators Built-in IR illuminators, effective up to 50 meters with Smart IR Function, IR-III LED * 2

Min. Illumination < 0.1Lux

Built-in Storage Micro SD SDHC/SDXC card slot

Thermal Imaging Temperature 20~100°C Distance ≤ 10 meters

Video

Compression H.264 High Profile

Bit Rate 16~6000 Kbps adjustable

Max. Streams 8 simultaneous stream

Streaming Adjustable resolution, quality and bit-rate

WDR Digital WDR (Level 1~10)

Audio Compression GSM Sample Rate 32Kbps

Interface Audio in: Phone Jack 3.5mm. Speak out: Phone Jack 3.5mm

Network On-Live Viewing up to 20 clients, Interface 10 base-TX / 100 Base-TX Ethernet (RJ-45)

Wireless (Optional on demand)

3GCDMA / TD-CDMA / WCDMA

4GTD-LTE / FDD-LTE

AntennaOne or Dual External Dipole Antenna

Intelligent Video

Motion DetectionTriple-window video motion detection

Alarm, Event and DI/DO

Alarm TriggersVideo motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection

Alarm EventsEvent notification using digital output, HTTP, SMTP, FTP and NAS server File upload via HTTP, SMTP, FTP and NAS server

DI / DO FunctionDI: DC 9~24V Input

DO: Switch, Max. Load DC 5~24V 1A

General Information

Power SupplyPoE: Max. 12.0 W (IEEE 802.3af)

DC: 12V / 1A Max. 12.0 W

Power Consumption< 7.5 W

Dimensions156*105*87(mm)

WeightNet: 1060 g

Safety Cert.CE, FCC, UL

Operating Temp.-10°C ~ 65°C

System Accessories

Operating SystemMicrosoft Windows 10 / 8 / 7 / Vista / XP / 2000

Web BrowserMozilla Firefox 7~29 or above

Internet Explorer 7.x or 8.x, 9.x, 10.x, 11.x

Google Chrome 37.0.2602 or above